

CC6561GK Gas Walk Behind Saw




Gasoline
Powered

POWER, RELIABILITY & CONVENIENCE

14"-42" Blade Capacity

Self-Propelled

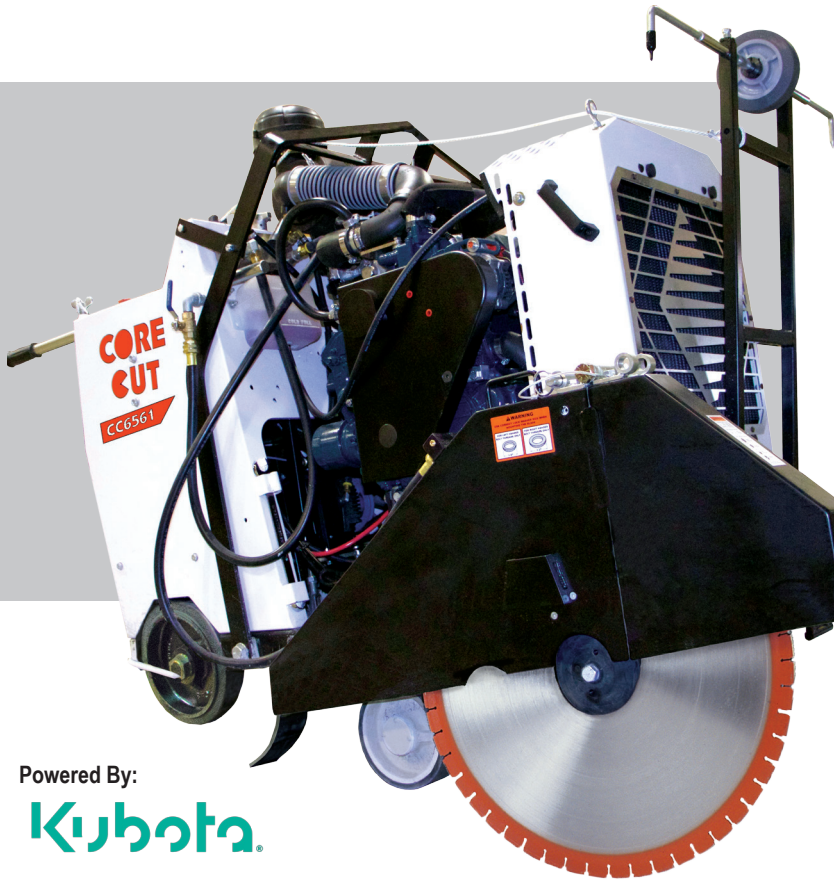

Powered By:



Features & Benefits:

- Liquid-cooled Kubota® gasoline WG2503, spark ignited industrial 61HP engine that is fully compliant with EPA regulations
- Self-propelled Eaton Model 10 transmission
- Fits through a 36" door frame
- Strongest frame on the market
- 4 stage air filter system
- 17-3/4" maximum cutting depth
- Developed on an industrial diesel engine platform
- Very low noise and vibration
- Electronic fuel injection
- Modern computer engine controls (same as the CC6571D).
- 3-way catalytic muffler that meets the latest EPA & CARB emission requirements
- Single and 3-speed versions
- Specifications similar to CC6549D, but with more power and less noise, vibration and fumes

Specifications:

Maximum depth of cut with 14" blade: 4-1/2" (3-3/4" - 3-speed)
Maximum depth of cut with 20" blade: 7-1/2" (6-3/4" - 3-speed)
Maximum depth of cut with 26" blade: 10-1/2" (9-3/4" - 3-speed)
Maximum depth of cut with 30" blade: 11-3/4" (11-3/4" - 3-speed)
Maximum depth of cut with 36" blade: 14-3/4" (14-3/4" - 3-speed)
Maximum depth of cut with 42" blade: 17-3/4" (17-3/4" - 3-speed)

Blade shaft diameter: 2"
Arbor size: 1" with drive pin
Blade shaft drive: 10 belt
Blade mounting: Right or left
Blade raise & lower: Electro-hydraulic pump
Transmission: Eaton model 10
Drive speed: 0-200 feet/minute
Air filter: 4 stage
Fuel capacity: 9 gallons

Includes:

Blade shaft tachometer Hour meter
Frame lift Telescoping front pointer
Parking brake Cutting depth indicator
Quick disconnect blade flanges Oil bath blade shaft



CC6561GK Control Panel

Detailed control panel for easy operator use.

Electronic engine controls for clean running and lower operating costs.

Parts List #1802551 / 1802552

Operator Manual: # 1804001

Diamond Products Limited
333 Prospect St. Elyria, OH 44035
800-321-5336 · www.diamondproducts.com



CC6561GK KUBOTA GAS WALK BEHIND SAWS - 61HP

Model #	Engine Make	Engine Power	Power Source	Speeds	Part #	Cat #	Blade Capacity
CC6561GK-14	Kubota® WG2503	61 HP	Gasoline	Single	5801180	75242	14"
CC6561GK-20	Kubota® WG2503	61 HP	Gasoline	Single	5801181	75241	20"
CC6561GK-26	Kubota® WG2503	61 HP	Gasoline	Single	5801182	48097	26"
CC6561GK-30	Kubota® WG2503	61 HP	Gasoline	Single	5801183	74109	30"
CC6561GK-36	Kubota® WG2503	61 HP	Gasoline	Single	5801184	75243	36"
CC6561GK-42	Kubota® WG2503	61 HP	Gasoline	Single	5801185	75245	42"
CC6561GK-3-14	Kubota® WG2503	61 HP	Gasoline	3-Speed (14"/26"/36")	5801190	75246	14"
CC6561GK-3-20	Kubota® WG2503	61 HP	Gasoline	3-Speed (20"/30"/42")	5801191	75249	20"
CC6561GK-3-26	Kubota® WG2503	61 HP	Gasoline	3-Speed (14"/26"/36")	5801192	75251	26"
CC6561GK-3-30	Kubota® WG2503	61 HP	Gasoline	3-Speed (20"/30"/42")	5801193	75252	30"
CC6561GK-3-36	Kubota® WG2503	61 HP	Gasoline	3-Speed (14"/26"/36")	5801194	75254	36"
CC6561GK-3-42	Kubota® WG2503	61 HP	Gasoline	3-Speed (20"/30"/42")	5801195	75255	42"

CC6561GK OPTIONS

Description	Part #	Cat #
Water Safety Switch	6010522	67821
Water Pump (electric)	6011032	02506
Spot Light	6010112	02427
Lowering Speed Metering Valve	6010227	02480
Blade stacking kit - 4-1/2" flange (for blades 1-1/2" apart)	6010630A	23186
Blade spacing kit - 4-1/2" flange (for blades 2" apart)	6010631A	23187
Blade spacing kit - 4-1/2" flange (for blades 4" apart)	6010632A	16558
14" Tapered Mount Blade Guard	6010950	20011
20" Tapered Mount Blade Guard	6010952	08213
26" Tapered Mount Blade Guard	6010954	19322
30" Tapered Mount Blade Guard	6010956	20456
36" Tapered Mount Blade Guard	6010958	13375
42" Tapered Mount Blade Guard	6010960	08216

CC6561GK SINGLE SPEED RPM

Blade Size	Blade RPM	Max Cut Depth
14"	2700	4-1/2"
20"	2400	7-1/2"
26"	1950	10-1/2"
30"	1700	11-3/4"
36"	1400	14-3/4"
42"	1200	17-3/4"

CC6561GK 3-SPEED RPM

Blade Size	Blade RPM	Gear Setting High, Med, Low	Max Cut Depth
14"	2700	H	3-3/4"
20"	2550	H	6-3/4"
26"	1775	M	9-3/4"
30"	1675	M	11-3/4"
36"	1175	L	14-3/4"
42"	1100	L	17-3/4"

